

# Emergency Box Supporting UFO High Bay



## Features

- UL Listed for US and CANADA
- Listed to UL924 and tested to CSA C22.2 NO.141 Field or factory installation
- High output voltage
- Low energy consumption CEC Title20 compliance
- Constant output power
- Self-testing
- Battery: over temperature protection



## Specifications

- Input Voltage: 100~347Vac, 50/60Hz
- Input Current: 200mA max.
- Input Power Rating: 10W
- Recharge Time: 24Hrs
- Output Voltage: 170Vdc
- Emergency Power: 15W/25W/40W
- Discharge Time: 1.5H
- Battery: Ni-MH or Li-ion
- Warranty: 5 Years
- Ambient Temp: 41~122°F (5~50°C)
- Weight: 7.3 lbs (3.3kg)




## Model NO.


Model No.	Emergency Power
EMUFO-25170-YY	25W
EMUFO-40170-YY	40W

## Dimensions


Flexible Conduit : 13"

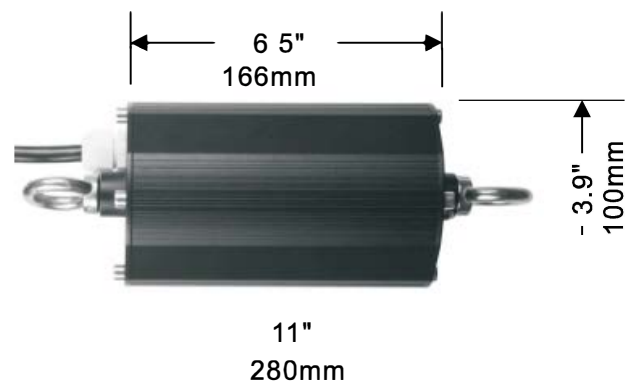


## A) With Dimmer

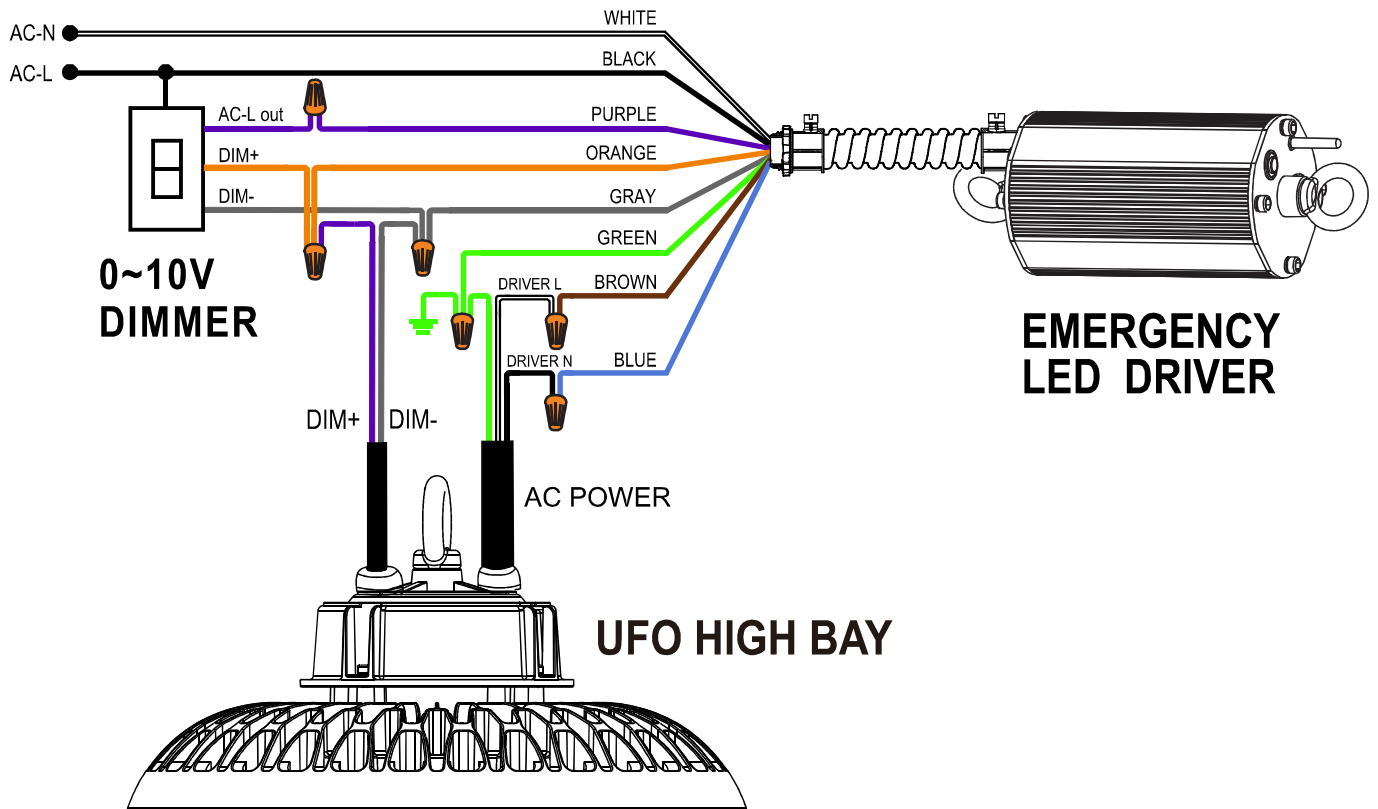

## B) Without Dimmer

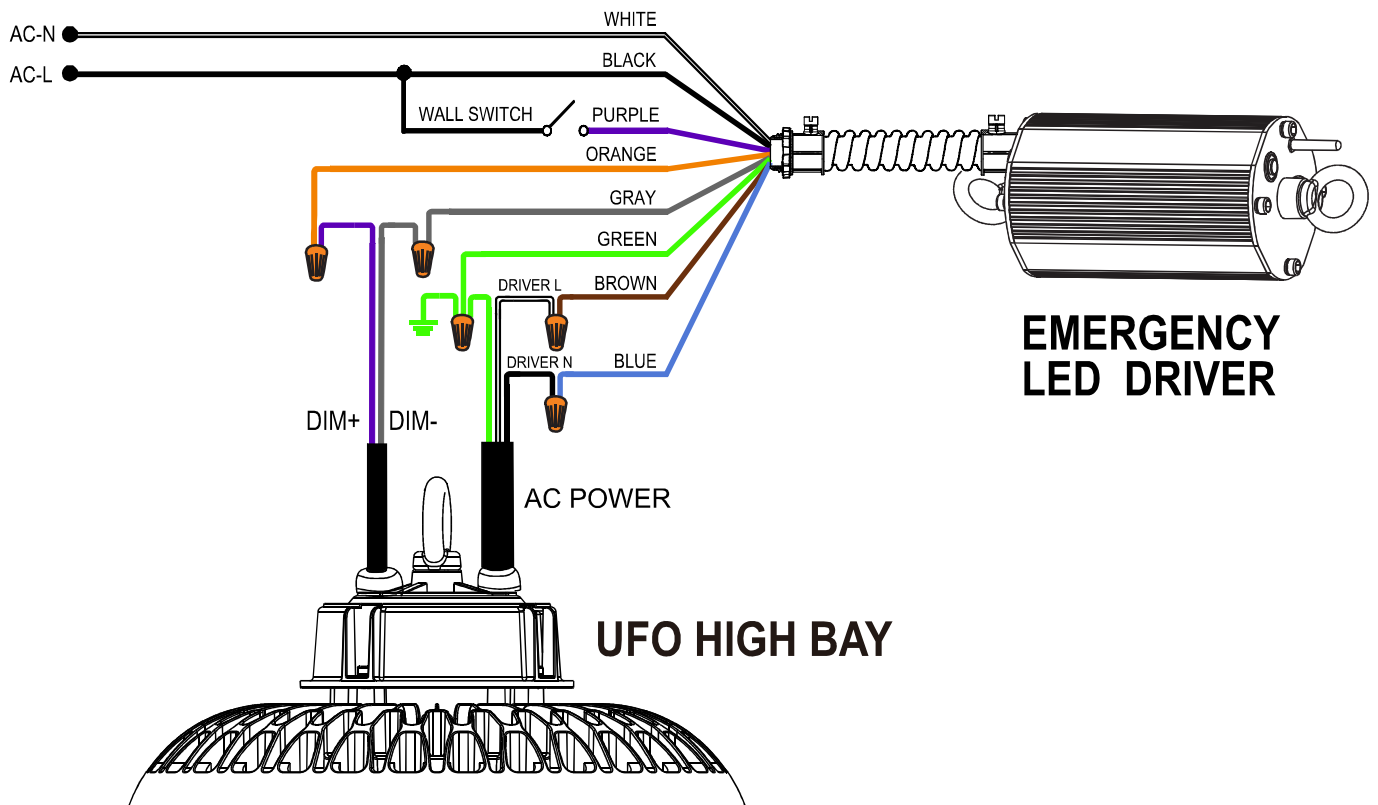

## C) Without Switch and Without Dimmer

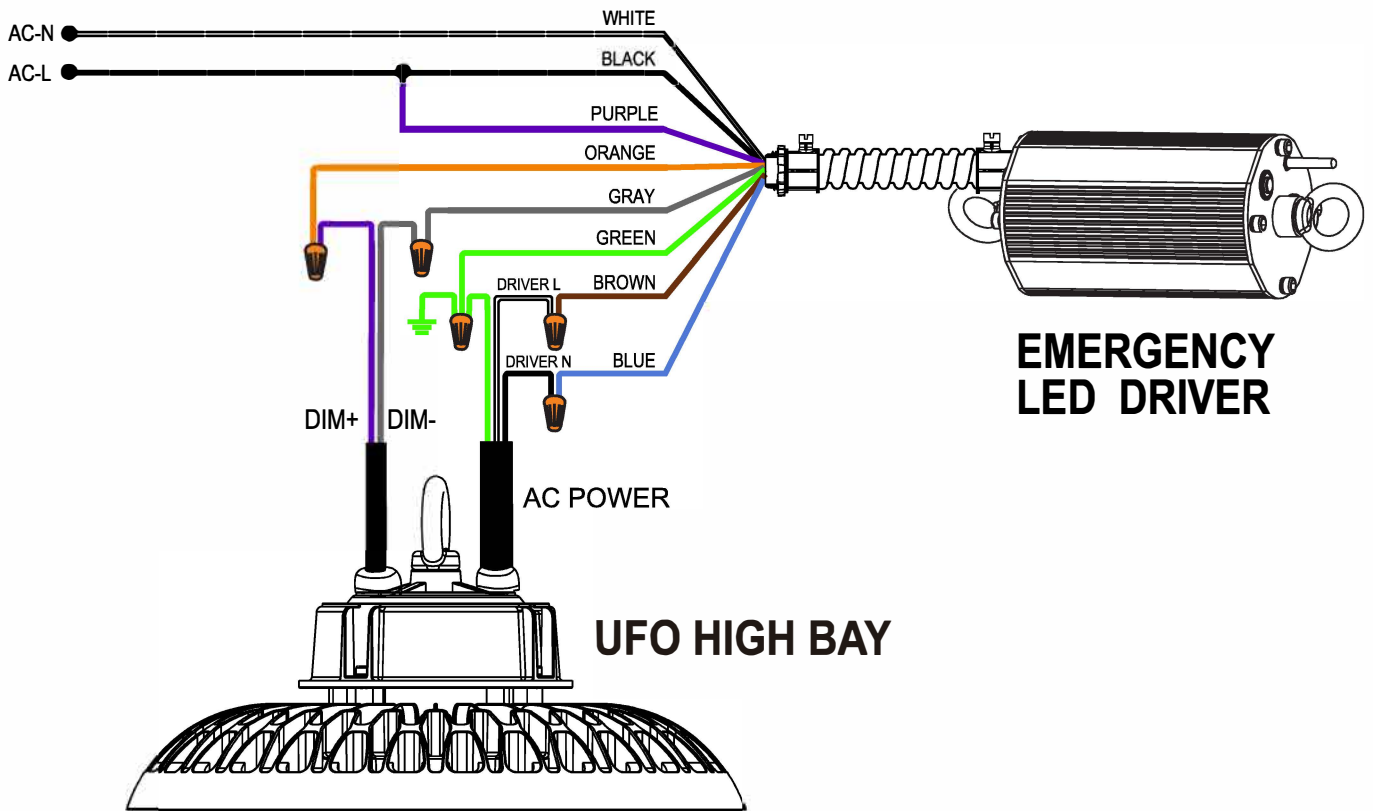

## D) With Sensor

